

## Conceptual framework

Compare possible networks on given  $n$  cities.

Optimize trade-off between

- cost to build/operate network
- benefit (to operator, or cost to users).

Usually studied as algorithmic question. This talk focusses on theoretical understanding of properties of optimal networks in the  $n \rightarrow \infty$  limit.

## **Wanted: input from Transportation Engineering**

(1) We use absurdly oversimplified “cost” and “benefit” functionals; what is next step towards realism?

(2) [undergrad research project, in progress]. Look at data on real-world networks. How close are they to optimal, and in what sense of “optimal”?

I have a non-obvious conjecture about what road networks optimize . . . . .

**Spatial networks** arise in many disciplines

Telephone (landline; cell)

Transportation (road, rail)

Distribution (electricity grid; Walmart)

Regional (spatial) economics

Biological (e.g. blood circulation to cells)

But what does this have to do with probability?

**Analogy:** the Galton-Watson branching process provides a mathematically simple “toy model” for broad notion of “branching process”.

**Goal:** find a collection of mathematically simple “toy models” for spatial networks. Randomness can be introduced to model disorder (inhomogeneity) in space. One well known model is

**Model 1: the geometric random graph** (e.g. Penrose (2003) monograph).

Poisson point process; link two points if they are at distance  $\leq c$  apart.

Ingredient in models for cell phone (“ad hoc”) networks; much EE work over last 10 years, e.g.

P Gupta, PR Kumar (2000): The capacity of wireless networks. [Cited by 1496].

I'll show three snapshots of different models, involving

optimal design of networks (A, B)

optimal flow through a random network (C).

We study  $n \rightarrow \infty$  asymptotics ( $n =$  number of “cities”), which is a different (and less realistic?) methodology from what's done in other “spatial networks” disciplines.

Use a “density 1” convention:  $n$  cities in square of area  $n$ .

## (A): Hub-and-spoke networks

(passenger air travel; package delivery)

Seek to model the situation where the time to travel a route depends on route length and number of hops/transfers. Introduce a weighting parameter  $\Delta$  and define (for a network  $\mathcal{G}_n$  linking  $n$  cities  $\mathbf{x}_n$  in square of area  $n$ )

time to traverse a given route from  $x_i$  to  $x_j$

$$= n^{-1/2}(\text{route length}) + \Delta(\text{number of transfers}).$$

$$\text{time}(i, j) = \min. \text{ time, over all routes}$$

$$\begin{aligned} \text{time}(\mathcal{G}_n) &= \text{ave}_{i,j} \text{time}(i, j) \\ &\geq n^{-1/2} \text{ave}_{i,j} d(i, j) := \text{dist}(\mathbf{x}_n). \end{aligned}$$

This set-up leads to a 2-parameter question. What network  $\mathcal{G}_n$  over cities  $\mathbf{x}_n$  minimizes  $\text{time}(\mathcal{G}_n)$  for a given value of total length and  $\Delta$ ?

Some numerical solutions from Gastner - M. Newman (2006).

Let's think about designing a network where routes involve 3 hops (2 transfers). Here's one scheme.

Divide area- $n$  square into subsquares of side  $L$ . Put a **hub** in center of each subsquare.

Link each pair of hubs.

Link each city to the hub in its subsquare (a **spoke**).

Cute freshman calculus exercise: what total network length do we get by optimizing over  $L$ ?

[length of short edges]: order  $nL$

[length of long edges]: order  $(n/L^2)^2 n^{1/2}$ .

Sum is minimized by  $L = \text{order } n^{3/10}$  and total length is order  $n^{13/10}$ .

This construction gives a network such that (even for worst-case configuration  $\mathbf{x}_n$ )

$$(i) \quad \text{time}(\mathcal{G}_n) - \text{dist}(\mathbf{x}_n) \rightarrow 2\Delta$$

$$\text{len}(\mathcal{G}_n) = O(n^{13/10}).$$


**Theorem 1** *For “really 2-dimensional”  $\mathbf{x}_n$ , no networks satisfying (i) can satisfy*

$$\text{len}(\mathcal{G}_n) = o(n^{13/10}).$$

Idea of 2-page hack proof: the only way to improve the construction would be to have shorter “short edges”, implying more hubs and hence more “long edges”.

Can you find a 1/2-page proof?

Schematic: length of network required for a given average number of hops and given weight parameter  $\Delta$ .

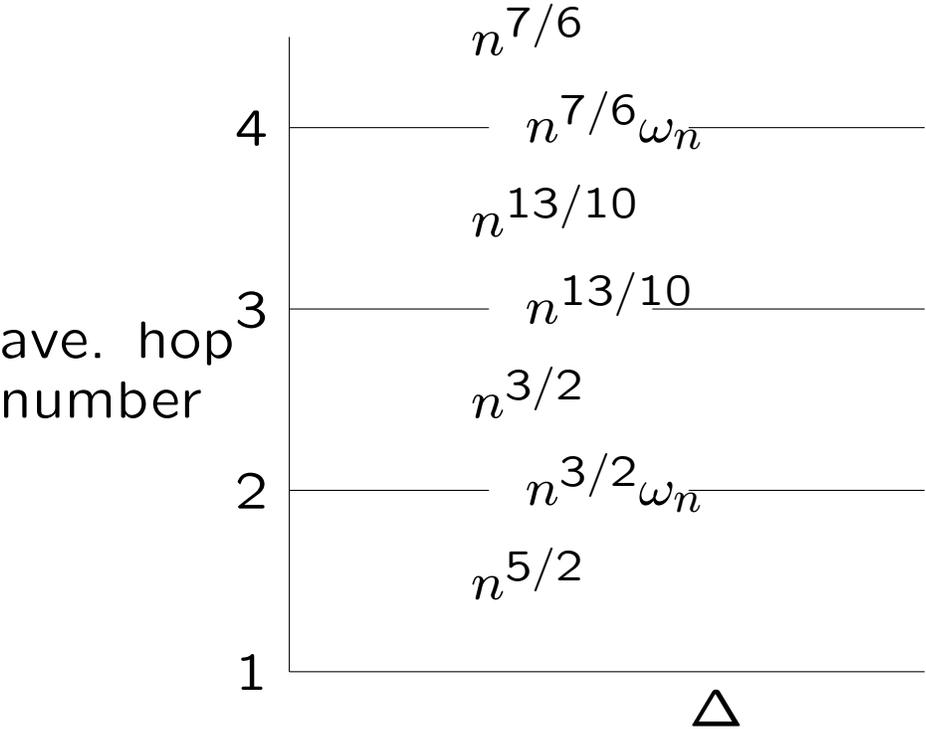

Our analysis is too crude to reveal how (for fixed large  $n$ ) optimal network changes as we vary  $\Delta$ .

## (B): Optimal design of road/rail networks

Given  $n$  “cities” in square of area  $n$ . Want to create a network by adding edges. Study trade-off between **cost** and **benefit** of network. Take

**cost** = total length of network

and benefit (later) is some notion of “shortness of routes”. First consider extreme case where we just minimize total length. The minimum-length connected network on cities  $\mathbf{x}_n$  is by definition the **Steiner tree**, which has some length  $ST(\mathbf{x}_n)$ . But ST is clearly inefficient as a transportation network: routes are long.

For a network on  $\{x_1, \dots, x_n\}$  write  
 $d(i, j)$  = straight-line distance from  $x_i$  to  $x_j$   
 $\ell(i, j)$  = route length from  $x_i$  to  $x_j$ .

First statistic to measure “benefit”:

$$R := \text{ave}_{i,j} \frac{\ell(i, j)}{d(i, j)} - 1.$$

First guess at cost-benefit trade-off:

*If network-length is constrained to be (say) 1.5 times  $ST(\mathbf{x}_n)$  then we can always make  $R$  less than (say) 0.2.*

It turns out that we can do much better than that. Recall that typically  $d(i, j)$  is order  $n^{1/2}$ , so the first guess puts the “excess length”  $\ell(i, j) - d(i, j)$  as order  $n^{1/2}$ . Recall typically  $\text{len}(ST(\mathbf{x}^n))$  is order  $n$ .

**Theorem 2 (with Wilf Kendall)** *In worst case we can design networks  $\mathcal{G}(\mathbf{x}_n)$  such that*

$$(i) \text{ len}(\mathcal{G}(\mathbf{x}_n)) - \text{len}(ST(\mathbf{x}_n)) = o(n)$$

$$(ii) \text{ ave}_{i,j}(\ell(i, j) - d(i, j)) = o(\omega_n \log n)$$

*for  $\omega_n \rightarrow \infty$  arbitrarily slowly.*

(Preprint on Arxiv).

This rests upon a construction we'll show. There is a lower bound: under technical assumptions that the points are “truly 2-dimensional”, if (i) holds then the average (ii) is at least order  $\log^{1/2} n$ .

The construction is simple: take the Steiner tree and superimpose a **Poisson line process** of small density  $\eta > 0$ .

Why does this network have short routes? Key is a cute calculation.

**Lemma 3** *Take a PLP of rate 1. Erase the lines separating  $(0,0)$  from  $(x,0)$ . Now these two points lie in a convex region  $R(x)$  bounded by PLP lines.*

$$\mathbb{E}(\text{boundary length of } R(x)) - 2x \sim \frac{8}{3} \log x.$$

So there is a route using PLP lines from near  $(0,0)$  to near  $(x,0)$  of length around  $x + \frac{4}{3} \log x$ .

**Comment.** The math is basically 100-year-old integral geometry.

The lower bound result is: under an “equidistribution” assumption on  $\mathbf{x}_n$

For any network  $\mathcal{G}(\mathbf{x}_n)$  whose length is  $O(n)$ ,

$$\text{ave}_{i,j}(\ell(i,j) - d(i,j)) \geq c_* \log^{1/2} n.$$

7-page proof involves tension between two facts.

**1.** If there is a short route between  $x_i$  and  $x_j$  then a random orthogonal line (rooted where it crosses  $\overline{x_i x_j}$ ) must cross a network line at some distance  $\leq y_n$  from the root and at same angle  $\frac{\pi}{2} \pm \delta_n$ .

**2.** For any length  $Ln$  network in the square of area  $n$ , the positions and angles of intersections of a random line with the network have a mean intensity which just depends on  $L$ .

To relate these facts, need to know that the process

pick random  $x_i, x_j$  from  $\mathbf{x}_n$ , take random line orthogonal to  $\overline{x_i x_j}$

is approximately the same as “take a random line”. Here we need the “equidistribution” assumption on  $\mathbf{x}_n$ .

**(C) Optimal flows through the disordered lattice.** (Preprint on Arxiv). Here cities/roads correspond to vertices/edges of the two-dimensional grid.

**Order-of-magnitude calculation** on  $N \times N$  grid. Send flow volume  $\rho_N$  between each (source, destination) pair. Average flow volume  $\bar{f}$  across edges is

$$(N^2 \times N^2) \times \rho_N \times N \approx \bar{f} \times N^2$$

To make  $\bar{f}$  be order 1 we take

$$\rho_N = \rho N^{-3} \quad \text{where } \rho \text{ is normalized demand.}$$

**Open Problem.** Take i.i.d. random capacities ( $\text{cap}(e)$ ) with  $0 < c_- \leq \text{cap}(e) \leq c_+ < \infty$ . Obvious: a feasible flow with normalized demand  $\rho$  exists for  $\rho < \rho_-$  and doesn't exist for  $\rho > \rho_+$ . Prove there is a constant  $\rho_*$  depending on distribution of  $\text{cap}(e)$  such that as  $N \rightarrow \infty$

$$P(\exists \text{ feasible flow, norm. demand } \rho) \begin{array}{l} \rightarrow 1 \quad , \quad \rho < \rho_* \\ \rightarrow 0 \quad , \quad \rho > \rho_* . \end{array}$$

Instead of focussing on capacities, let's focus on congestion. In a network without congestion, the cost (to system; all users combined) of a flow of volume  $f(e)$  scales linearly with  $f(e)$ . With congestion, extra users impose extra costs on other users as well as on themselves. So cost scales super-linearly with  $f(e)$ .

**Model:** The cost of a flow  $\mathbf{f} = (f(e))$  in an environment  $\mathbf{c} = (c(e))$  is

$$\text{cost}_{(N)}(\mathbf{f}, \mathbf{c}) = \sum_e c(e) f^2(e).$$

**Theorem 1.**  $N \times N$  torus (for simplicity)  
Large constant bound  $B$  on edge-capacity (for simplicity)  
i.i.d. cost-factors  $c(e)$  with

$$0 < c_- \leq c(e) \leq c^+ < \infty.$$

Let  $\Gamma_N$  be minimum cost of flow with normalized intensity  $\rho = 1$ . Then

$$N^{-2} E \Gamma_N \rightarrow \text{constant}(B, \text{dist}(c(e))).$$

**Comments.** Methodology is to compare with flows across (boundary-to-boundary)  $M \times M$  squares. Should work to prove existence of limits in other “optimal flows on  $N \times N$  grid” models. But details are surprisingly hard to prove. Theorem 1 has 36 page proof!